



Electronic Service Manuals

This electronic document is provided as a service to our customers. We do not create the contents of the information contained in this document. Should you have detailed questions pertaining to the information contained in this document, you may contact Michco, or the manufacturer which provided the original information in this electronic deliverable. Michco's only part in this electronic deliverable was the electronic assembly process.

You may contact Michco through the following methods:
Phone (517) 484-9312 or (800) 331-3339 MI, OH, IN only
2011 N. High St. -- Lansing, Michigan -- 48906
Fax: (517) 484-9836
Email: CustServ@Michco.com
Web site: www.Michco.Com
Parts Web site: www.FloorMachineParts.Com

Order Parts on Line at:
www.FloorMachineParts.Com

Directly to Parts & Service:
By Email: **Shop@Michco.com**
By Fax: (517) 702-2041
By Voice: Use numbers above.

Serving the Cleaning Industry Since 1922

Notice: All copyrighted material remains property of original owners, all trademarks are property of respective owners. Manuals are subject to Manufacturer's reproduction limitations. Originals or reproductions were provided by manufacturers through a request. We make no warranty as to the correctness of information provided in this document and you assume all risk.


Parker®

SCAVENGER HOSE KIT

Part No.
MA-482-C

ASSEMBLY INSTRUCTIONS

1. Fit one end of Hose over the aluminum casting on the Hose Adaptor Assembly (#4), and secure in place with one Hose Clamp (#2).
2. Fit other end of Hose over the Extension Assembly (#1) and secure with other clamp.
3. Tip machine back so the nozzle is off the ground.
4. With the two Thumbscrews (#5) loosened place the back edge of Hose Adaptor Assembly (#4) up inside the back lip of the nozzle.
5. The two Brackets on front edge of Hose Adaptor Assembly must hook up over front lip of nozzle.
6. Tighten Thumbscrews.
7. When using Hose Kit follow regular sweeper operating instructions.

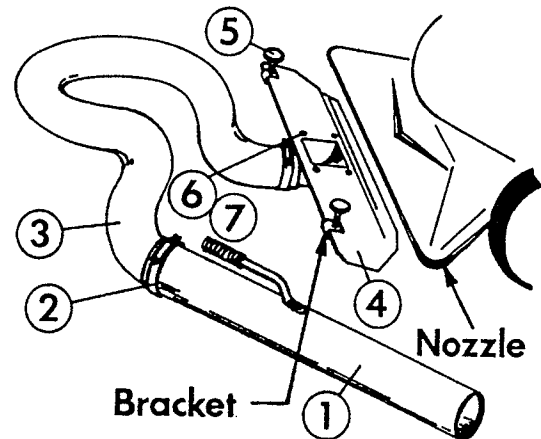

NOTE: Do not pull Sweeper Hose. Debris should feed into the hose gradually. Large quantities suddenly entering the hose may block off Hose areas requiring shut down and cleaning. If vacuum seems to be less than expected, a partial blockage may be present. See instructions "To Clear Hose Blockage".

PARTS LIST

Item	Part No.	Qty.	Description
1	SA-715-B	1	Extension Assembly
2	64-36-A	2	Hose Clamp
3	78-141-A	1	Hose
4*	SA-1152-A	1	Hose Adaptor Assembly
5*	64-44-A	1	Thumbscrew, 1/4 - 20 x 1
6*	515-10-6	4	Screw, Rd. Hd. Mach. 10 - 24 x 3/8
7	936-10	4	Lockwasher, Spring #10

* Supplied with Item 4, SA-1152-A. Standard hardware and should be obtainable from a local hardware distributor.

TO CLEAR HOSE BLOCKAGE

1. Stop engine.
2. Remove Hose Adaptor from the Nozzle.
3. Straighten Hose out.
4. Push a broomstick or other suitable object through the Hose to loosen blockage.

NOTE: Never attempt this operation while Hose Adaptor is attached to the Nozzle. Severe injury to person and damage to equipment could result.

Parker®

Parker Sweeper Company
A Division of Minuteman International, Inc.

111 South Rohlwing Road
Addison, Illinois 60101
Phone: (630) 627-6900
Fax: (630) 627-1130